

PRODUCT CODE	RATED DURATION	OPERATING MODE*	LIGHT SOURCE	ROUTING MODE	TYPE OF MOUNTING
BYPL02-S-XLED2	3 h	Maintained	20 x SMD LED	Double-sided	Surface Mounted


* Maintained : Lights on mains and stays alight in case of the mains failure.

MAINS DATA

PRODUCT CODE	RATED POWER (W)*	MAINS CURRENT (A)*	POWER FACTOR (PF)*	DIMENSIONS (mm)	WEIGHT (kg)	QTY in CARTON BOX
BYPL02-S-XLED2	4,5	0,034	0,58	108 x 341 x 245	1,070	1

* Measured under 230 V mains.

WIRING DIAGRAM

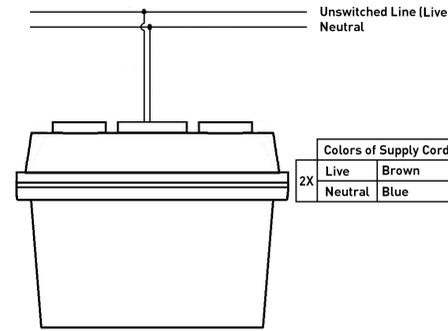

RECESSED MOUNTING HOLE SIZE



- Indoor and outdoor use
- Polycarbonate case and glass
- Moisture-proof
- SMD LED application
- High energy saving
- Long life-time (50.000 hours)
- Emergency lighting function by interruption of the unswitched phase
- Emergency lighting function in case of low-voltage
- 3 hours duration in case of emergency
- Charge status display with green LED
- Test switch
- High-temperature Ni-Cd battery cells
- Overcharge and deep discharge protection
- Ceiling mounted
- Optional - 110 VAC compatibility



Please refer to "Pictogram Table" in Emergency Exit Luminaires Overview section of the catalogue for alternatives.



In accordance with EN 60598-1, EN 60598-2-22 standards.


TECHNICAL DATA

SUPPLY VOLTAGE :	230 VAC 50/60 Hz	SIGN DIMENSIONS :	140 x 280 mm
AMBIENT TEMPERATURE (ta) :	-5 °C ... +40 °C	VIEWING DISTANCE :	24 m
RATED DURATION :	3 h	PROTECTION CLASS :	IP 65
BATTERY CHARGING TIME :	24 h	INSULATION CLASS :	II
BATARYA TİPİ:	3,6 V Ni-Cd		

CONTROL PANEL

- STATE: Charge Status LED . Indicates charging process of the battery.
- TEST: Test Button. Enables testing the product without mains cuts.

TECHNICAL DRAWING / SURFACE MOUNTED

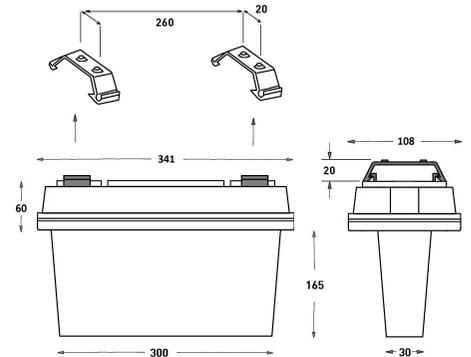

TECHNICAL DRAWING / RECESSED

