




- Wireless communication, Wi-Fi (802.11 b/g/n)
- Possible to access from anywhere in the world with cloud technology
- Remote monitoring and testing with WELCO software
- Double-sided
- Anodized aluminum case
- Polycarbonate side cover and hanger
- SMD LED application
- Status display with green and red LEDs
- Overcharge and deep discharge protection
- Transparent Plexiglas with screen printed
- Side lighting
- Ceiling mounted, ceiling recessed or wall mounted
- Optional - 110 VAC compatibility
- Optional - Metal hanger, hook or steel wire
- Optional - LiFePO4 or Ni-MH battery application



Please refer to "Pictogram Table" in Emergency Exit Luminaires Overview section of the catalogue for alternatives.

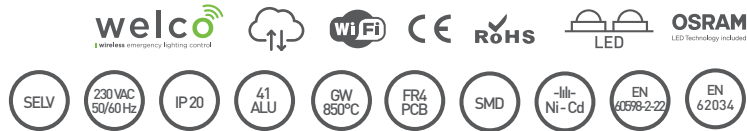

In accordance with EN 60598-1, EN 60598-2-22, EN 62034 standards.

TECHNICAL DATA

SUPPLY VOLTAGE :	230 VAC 50/60 Hz	SIGN DIMENSIONS :	122 x 253 mm
AMBIENT TEMPERATURE (ta) :	0 °C ... +40 °C	VIEWING DISTANCE :	20 m
RATED DURATION :	3 h	PROTECTION CLASS :	IP 20
BATTERY CHARGING TIME :	24 h	INSULATION CLASS :	I
BATTERY TYPE :	3,6 V Ni-Cd		

LED INDICATION FUNCTIONS

Permanent GREEN	Charge mode
Fast flashing GREEN (0,1s on - 0,1s off)	Function test
Slow flashing GREEN (1s on - 1s off)	Duration test
Permanent RED	Load failure
Slow flashing RED (1s on - 1s off)	Battery failure
Fast flashing RED (0,1s on - 0,1s off)	Charging failure
Double pulsing GREEN	Inhibit mode
Binary transmission of address via GREEN/RED	Addressing or identification
GREEN and RED off	Emergency mode

PRODUCT CODE	RATED DURATION	OPERATING MODE*	LIGHT SOURCE	ROUTING MODE	TYPE OF MOUNTING
BYAL-M08/WELCO-CY/SU	3 h	Maintained	10 x SMD LED	Double-sided	Surface Mounted - Plastic Hanger
BYAL-M08/WELCO-CY/SUMA	3 h	Maintained	10 x SMD LED	Double-sided	Surface Mounted - Steel Wire
BYAL-M08/WELCO-CY/MT	3 h	Maintained	10 x SMD LED	Double-sided	Surface Mounted - Metal Hanger
BYAL-M08/WELCO-CY/SA	3 h	Maintained	10 x SMD LED	Double-sided	Recessed Mounted



* Maintained: Lights on mains and stays alight in case of the mains failure.

MAINS DATA

PRODUCT CODE	RATED POWER (W)*	MAINS CURRENT (A)*	POWER FACTOR (PF)*	DIMENSIONS (mm)	WEIGHT (kg)	QTY in CARTON BOX
BYAL-M08/WELCO-CY/SU	4,82	0,032	0,63	40 x 274 x 195	0,665	1
BYAL-M08/WELCO-CY/SUMA	4,82	0,032	0,63	40 x 274 x 195	0,885	1
BYAL-M08/WELCO-CY/MT	4,82	0,032	0,63	40 x 274 x 195	0,745	1
BYAL-M08/WELCO-CY/SA	4,82	0,032	0,63	102 x 342 x 195	1,220	1

* Measured under 230 V mains.

RECESSED MOUNTING HOLE SIZE

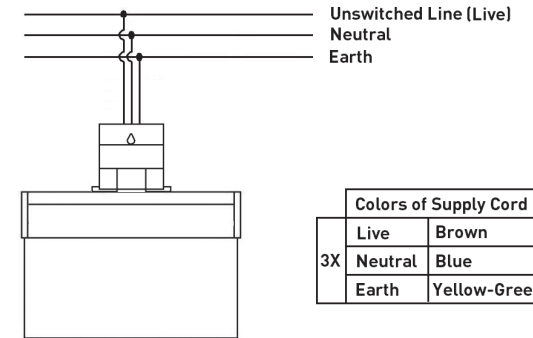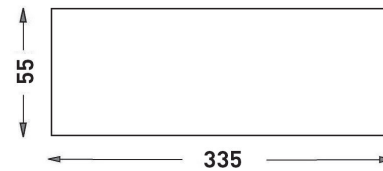

TECHNICAL DRAWING / SURFACE MOUNTED

TECHNICAL DRAWING / RECESSED MOUNTED

