



- Single- or double-sided
- Anodized aluminum case
- Polycarbonate side cover and hanger
- SMD LED application
- Charge status display with green LED
- Test switch
- High-temperature Ni-Cd battery cells
- Overcharge and deep discharge protection
- White acrylic plate
- Back lighting
- Ceiling mounted, ceiling recessed or wall mounted
- Optional - 110 VAC compatibility
- Optional - Metal hanger, hook or steel wire

PRODUCT CODE	RATED DURATION	OPERATING MODE*	LIGHT SOURCE	ROUTING MODE	TYPE OF MOUNTING
BYAL-XL06-LED-S	3 h	Maintained	24 x SMD LED	Double-sided (Lapın)	Surface Mounted - Hook Hanger
BYAL-XL07-LED-S	3 h	Maintained	24 x SMD LED	Single-sided (Lipsos)	Wall Mounted


* Maintained : Lights on mains and stays alight in case of the mains failure.

MAINS DATA

PRODUCT CODE	RATED POWER (W)*	MAINS CURRENT (A)*	POWER FACTOR (PF)*	DIMENSIONS (mm)	WEIGHT (kg)	QTY in CARTON BOX
BYAL-XL06-LED-S/3H	5,85	0,040	0,64	630 x 43 x 430	2,400	1
BYAL-XL07-LED-S/3H	5,85	0,040	0,64	630 x 43 x 430	2,400	1

* Measured under 230 V mains.

Please refer to "Pictogram Table" in Emergency Exit Luminaires Overview section of the catalogue for alternatives.

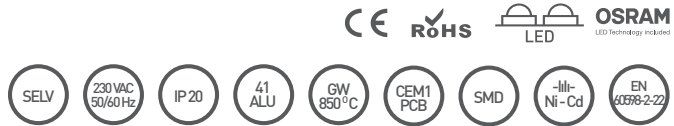


In accordance with EN 60598-1, EN 60598-2-22 standards.

TECHNICAL DATA

SUPPLY VOLTAGE :	230 VAC 50 / 60 Hz	SIGN DIMENSIONS :	400 x 597 mm
AMBIENT TEMPERATURE (ta) :	0 °C ... +40 °C	VIEWING DISTANCE :	50 m
RATED DURATION :	3 h	PROTECTION CLASS :	IP 20
BATTERY CHARGING TIME :	24 h	INSULATION CLASS :	I
BATARYA TİPİ:	3,6 V Ni-Cd		

WIRING DIAGRAM

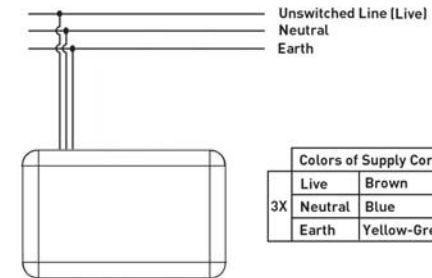

TECHNICAL DRAWING



CONTROL PANEL

- STATE: Charge Status LED . Indicates charging process of the battery.
- TEST: Test Button. Enables testing the product without mains cuts.