



Indoor use
Powder coated, white iron sheet case
Soft lighting with sanded glass
360° Motion sensor
Adjustable lighting duration
Adjustable night / day working mode
Energy saving
Long life-time (50.000 hours)
4000 K / 6500 K Color temperature
High light intensity (1000 lm)
Emergency lighting function by interruption of the unswitched phase
3 h duration in case of emergency
Charge status display with green LED
High-temperature Ni-Cd battery cells
Overcharge and deep discharge protection
Wall and ceiling mounted
(*Optional - Fire line application
Optional - 110 VAC compatibility

* The sensor is out-of-service when the luminaire is supplied on the fire line in case of emergency.




In accordance with EN 60598-1, EN 60598-2-22 standards.

MAINS DATA


PRODUCT CODE	STAND-BY RATED POWER (W)*	RATED POWER (W)*	MAINS CURRENT (A)*	POWER FACTOR (PF)*	DIMENSIONS (mm)	WEIGHT (kg)	QTY in CARTON BOX
AA106-VATOZ-L6SD/9W	0,7	12,90	0,080	0,66	300 x 300 x 100	0,90	1
AA106-VATOZ-L6SD/9W/K	2,0	13,50	0,090	0,65	300 x 300 x 100	1,10	1

* Measured under 230 V mains.

WIRING DIAGRAM

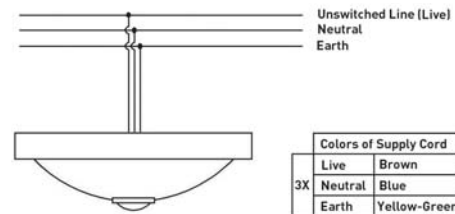

TECHNICAL DRAWING

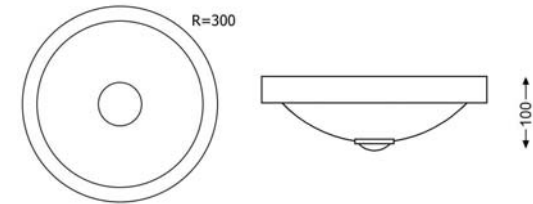

TECHNICAL DATA

SUPPLY VOLTAGE :	230 VAC 50/60 Hz	SENSOR TYPE :	360° PIR Sensor
AMBIENT TEMPERATURE (ta) :	0 °C ... +40 °C	CASE MATERIAL :	Iron Sheet
RATED DURATION :	3 h	LIGHT SOURCE :	60 pcs SMD LED
BATTERY CHARGING TIME :	24 h	PROTECTION CLASS :	IP 20
BATTERY TYPE :	3,6 V Ni-Cd	INSULATION CLASS :	I

PRODUCT LIST

PRODUCT CODE**	RATED DURATION	OPERATING MODE*	LIGHT SOURCE	LIGHT INTENSITY on ENERGY/EMERGENCY	TYPE of MOUNTING	BATTERY CHARGING TIME
AA106-VATOZ-L6SD/9W	-	Luminaire + Sensor	9 W / - LED	1000 lm / -	Surface Mounted	-
AA106-VATOZ-L6SD/9W/K	3 h	Maintained + Sensor	9 W / 3 W LED	1000 lm / 250 lm	Surface Mounted	24 h

* Luminaire: Lights just on mains
Maintained: Lights on mains and stays alight in case of the mains failure. (With battery kit)
Sensor: Lights on mains through sensor.