

PRODUCT CODE	RATED DURATION	OPERATING MODE*	LIGHT SOURCE	ROUTING MODE	TYPE OF MOUNTING
BYPL04-S-LED	3 h	Maintained	20 x SMD LED	Single-sided	Surface Mounted

* Maintained : Lights on mains and stays alight in case of the mains failure.

MAINS DATA


PRODUCT CODE	RATED POWER (W)*	MAINS CURRENT (A)*	DIMENSIONS (mm)	WEIGHT (kg)	QTY in CARTON BOX
BYPL04-S-LED	1,15	0,210	100 x 300 x 42	0,400	1

* Measured under 230 V mains.




- Indoor use
- Polycarbonate case and glass
- SMD LED application
- High energy saving
- Long life-time (50.000 hours)
- Emergency lighting function by interruption of the unswitched phase
- 3 hours duration in case of emergency
- Charge status display with green LED
- Test switch
- High-temperature Ni-Cd battery cells
- Overcharge and deep discharge protection
- Ceiling or wall mounted

Please refer to "Pictogram Table" in Emergency Exit Luminaires Overview section of the catalogue for alternatives.

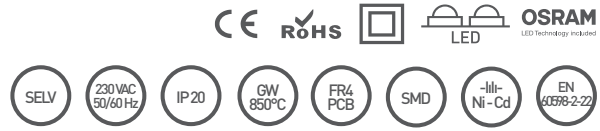


In accordance with EN 60598-1, EN 60598-2-22 standards.

WIRING DIAGRAM

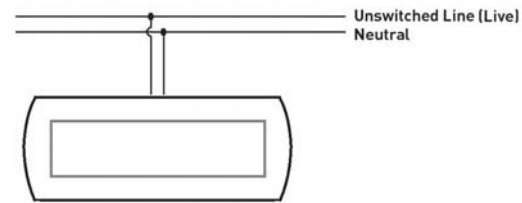

TECHNICAL DRAWING

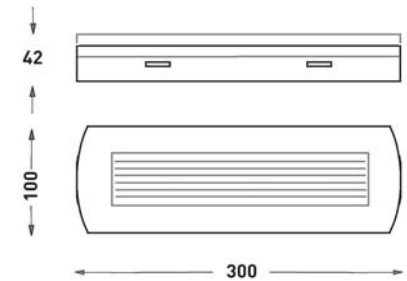

TECHNICAL DATA

SUPPLY VOLTAGE :	230 VAC 50/60 Hz	SIGN DIMENSIONS :	88 x 262 mm
AMBIENT TEMPERATURE (ta) :	0 °C ... +40 °C	VIEWING DISTANCE :	13 m
RATED DURATION :	3 h	PROTECTION CLASS :	IP 20
BATTERY CHARGING TIME :	24 h	INSULATION CLASS :	II
BATARYA TİPİ:	2,4 V Ni-Cd		

CONTROL PANEL

- STATE: Charge Status LED . Indicates charging process of the battery.
- TEST: Test Button. Enables testing the product without mains cuts.